


Peplink Balance Two

Versatile Small Branch Office Router



Specifications

| Balance Two | |
|---------------------------------|--|
| WAN Interface | 2x 10/100/1000M Ethernet Ports 1x USB Interface |
| LAN Interface | 4x 10/100/1000M Ethernet Ports |
| Router Throughput | 1Gbps |
| Recommended Users | 25-150 |
| Number of VPN/SpeedFusion Peers | 2 |
| PepVPN/SpeedFusion Throughput | 150Mbps |
| Power Input | Device: 12V DC |
| Power Consumption | 40W (max.) |
| Dimension (W x D x H) | 7.4 x 6.9 x 1.7 inches 188 x 175 x 42 mm |
| Weight | 2.2 pound / 1.2 kg |
| Operating Temperature | 32° – 104°F / 0° – 40°C |
| Humidity | 20% – 90% (non-condensing) |
| Certifications | CE, FCC, RoHS |
| Warranty | 1-Year Limited Warranty |

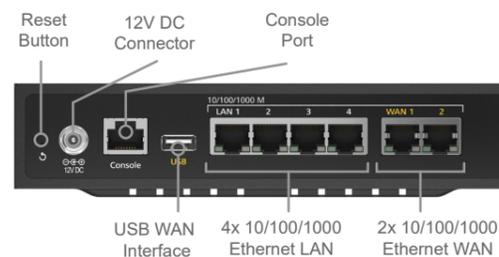

Peplink Balance Two

Versatile Small Branch Office Router



1Gbps Throughput, Under \$1000 USD*

With 2x GE WAN, 4x GE LAN, and a WLAN controller, the Balance Two provides ample connectivity for smaller enterprise branch offices.



* Pricing applies to US region only, other regions may vary.

Ordering Information

| Product Code | Description |
|--------------|---|
| BPL-TWO | Balance Two, Advanced Dual-WAN Router for Branch Networking |

Feature Add-On

| Product Code | Description |
|---------------|--|
| BPL-TWO-LC-SF | SpeedFusion bonding license |
| PVN-LC-05 | Up to 5 PepVPN/ SpeedFusion Peers License Key for Selected Models |
| PVN-LC-10 | Up to 10 PepVPN/ SpeedFusion Peers License Key for Selected Models |
| PVN-LC-20 | Up to 20 PepVPN/ SpeedFusion Peers License Key for Selected Models |

Features

| | | | | |
|---|---|---|--|--|
| WAN USB 4G/3G Modem Support Support for PPPoE, Static IP, DHCP Support for Dynamic DNS services WAN Link Health Check Intelligent Failover Bandwidth Allowance Monitor | AP Controller AP Controller Support Wi-Fi Usage Statistics | Load Balancing Intelligent Failover Session Persistence Per-Service Load Distribution Multiple Algorithms | Advanced QoS User Groups Bandwidth Reservation Individual Bandwidth Limit Application Prioritization By User Groups SIP, HTTPS, VPN QoS Custom Application QoS Web Blocking Blacklist | Device Management Web Administrative Interface Command Line Interface InControl Cloud Management Email Notification Active Client & Session Lists Bandwidth Usage Statistics Syslog Service SNMP v1, v2c and v3 |
| LAN DHCP Server for LAN Clients Extended DHCP Options DHCP Reservation DNS Proxy for LAN Clients Per-Port VLAN | Complete VPN Solution PepVPN/SpeedFusion ^ Site-to-Site VPN Bandwidth Aggregation ^ Hot Failover ^ 256-bit AES Encryption Pre-shared Key Authentication Dynamic Routing L2TP with IPsec VPN Server PPTP VPN Server RADIUS, LDAP Authentication IPsec VPN (Network-to-Network) | Networking NAT and IP Forwarding Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP WINS Server | Captive Portal Support Support for Wired and Wireless LAN Clients Support RADIUS Authentication Time and Usage Quotas on Open Access Mode Built-in Customizable Splash Page | Package Content Balance Two 12V Power Supply |
| Security Stateful Firewall DoS Prevention | | | | |

^ SpeedFusion is available as an optional add-on

Intelligent Traffic Steering



Traffic Steering automatically identifies packets by their application (e.g. Skype, PoS, ERP). Apply different SpeedFusion technologies to different kinds of traffic.

Fits Seamlessly in Any Office

The fanless design keeps the Balance Two whisper-quiet. Rear facing ports give the device a clean look, fitting any office environment.



Scalable, Centralized Management



Use InControl to make your deployment scalable. Centralize VLAN, outbound policy, firewall rules, configuration profiles and more in minutes.